

Fuse box

Type 8557

Fuse holder type 855750
to hold max. 2 fuses

8557



Description


The type 8557 fuse box was developed especially for installation on site. Due to the wide variety of attachment options, attachment to walls and masts, etc., is possible with screws or holding strips.

The fuse box is supplied as a rule with one or two fuse holders of type 855750 (blank installation without internal fittings or with more fuse holders are available on request).

The electrical connection is made directly at the fuse holder, screw size M6, max. cross-section 50 mm².

The type and size of the metric screw fittings or the screw fittings for protective hose systems are determined by the local circumstances and hence are tailored individually. The size, type and number of screw fittings must therefore be specified when ordering.

The fuse box can either be attached by screws that are hidden by the lid or else by wall fastening brackets. There is a holder available that is designed especially for mounting to a mast with a strip.

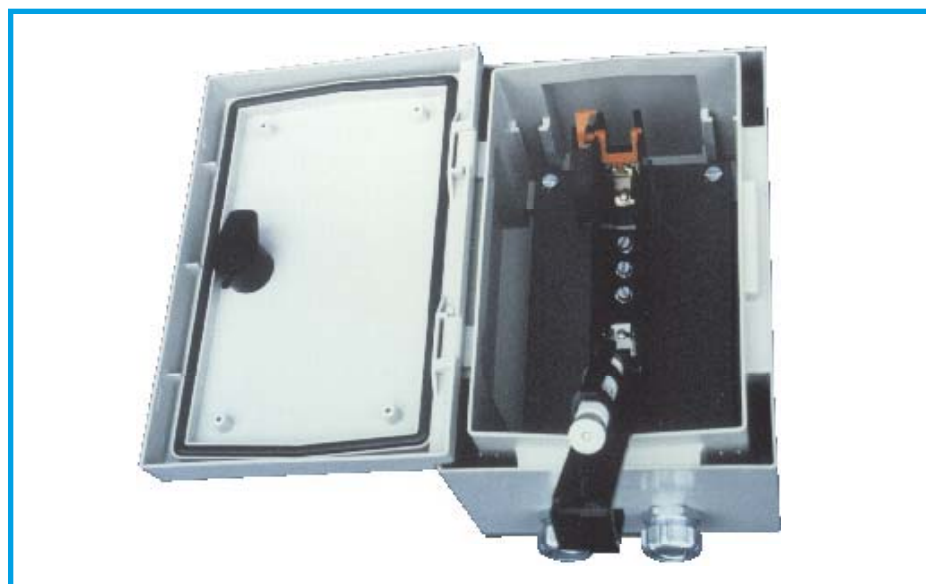

If the type 855750 fuse holder is ordered especially, it can be attached with 3 x M6 cylinder head screws. The fuse holder has a microswitch with a zero-potential changeover contact (flat plug connection 6.3 mm) to report the triggering of the fuse and to report »Cover of the holder is open«.

The fuse holder can take fuses with the following dimensions: diameter 20 mm and length 127 mm. Trigger values of from 6 A to 63 A are available for max. DC 1000 V.

Special configurations of the fuse box and special solutions on request.


Technical data

Dimensions	Housing, see figure WxHxD 215/315/170 mm
Material	
Holder	Phenolic resin
Housing	Polyester
Attachment	
Holder	3 x M6 (cylinder head)
Housing	Wall fastening brackets 4xM6 → 8557 1- Strip-type fastening → 8557 2-
Type of protection	Housing: IP 67
Screw fitting	as per order
Connection	directly at the fuse holder max 50 mm ²
Configuration	
Housing	1 fuse holder → 8557 -1- 2 fuse holders → 8557 -2
Fuses	Ø 20 mm x 127 mm with metal cap DC 1000 V, 6 A to 63 A (please specify the desired rated current when ordering, see also brochure sheet 8950)

Ordering information

Type	Part No.
8557 11	810701

Type 8557

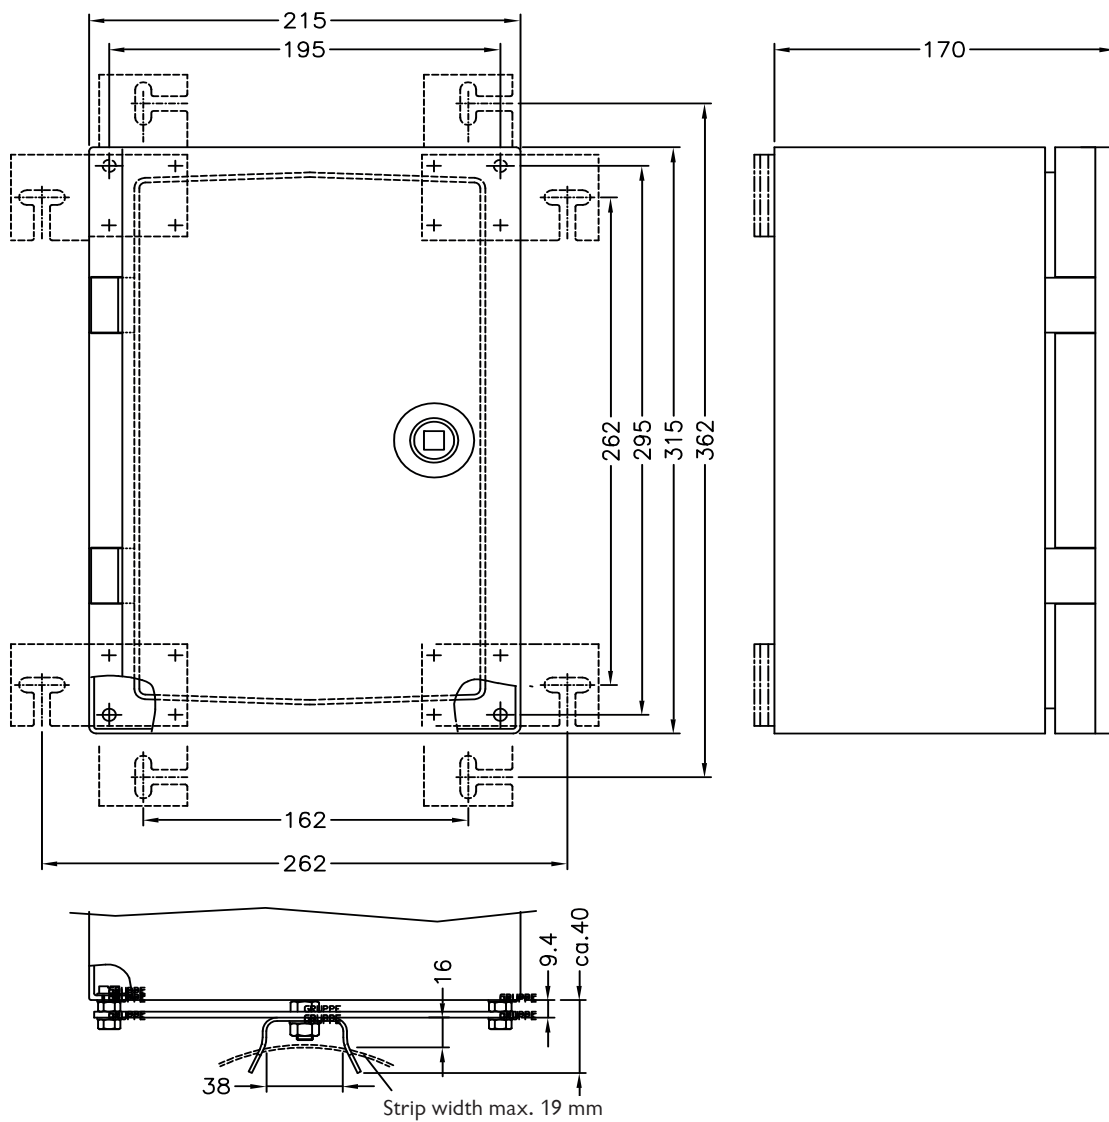

Type 855750 fuse holder

